


# CSM 1200 / 1300



## YARI OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE



**HAREKET SİSTEMİ**  
LINEAR GUIDING

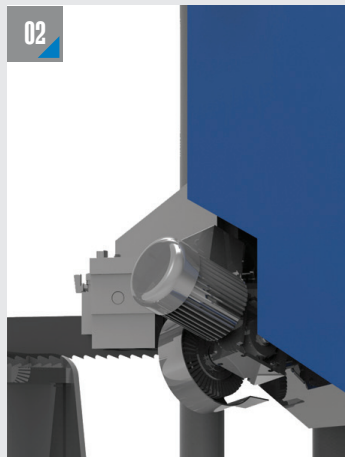

**TALAŞ TEMİZLEME FIRÇASI**  
CHIP BRUSH




**ŞERİT GERDİRME SİSTEMİ**  
BLADE TENSIONING



**MENGENE SİSTEMİ**  
CLAMPING SYSTEM

## ÖLÇÜLER DIMENSIONS

## SÜTUNLU MODELLER DOUBLE COLUMN TYPES

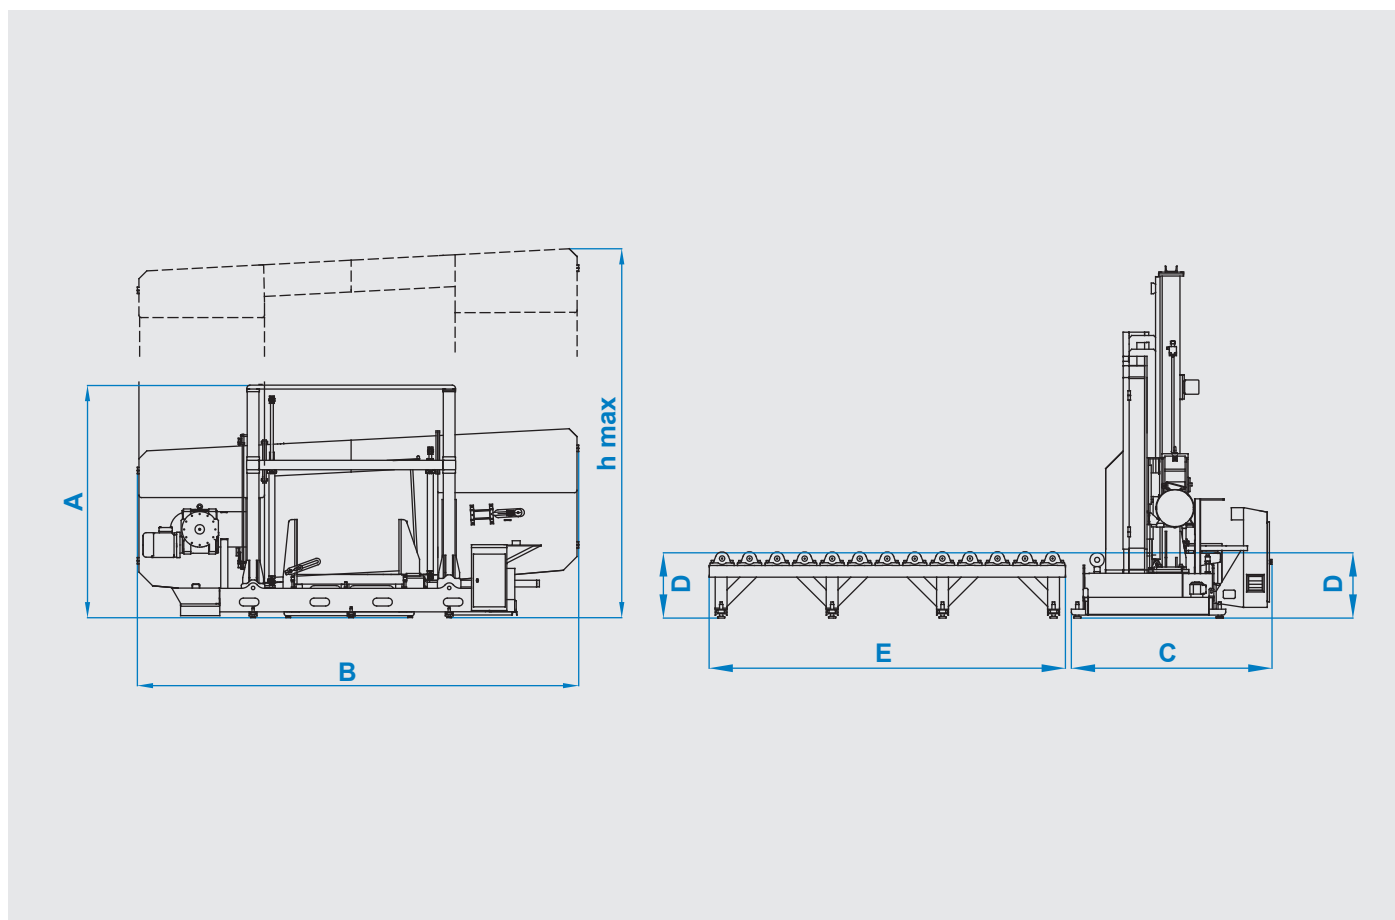

## TEKNİK ÖZELLİKLER / TECHNICAL FEATURES

A	3000 mm 118.11 inch	B	5625 mm 221.46 inch	C	1690 mm 66.54 inch	D	525 mm 20.67 inch	E	3000 mm 118.11 inch	hmax	3725 mm 146.65 inch
---	------------------------	---	------------------------	---	-----------------------	---	----------------------	---	------------------------	------	------------------------

	Yarı Otomatik Semi Automatic		Serit Ölçüsü Blade Dimension 67 x 1.6 x 12450 mm 2 5/8 x 0.063 x 490.1 inch		Serit Motoru Blade Motor 7.5 kW - 1500 d/d 10 hp - 1500 rpm		Talaş Konveyör Motoru Chip Conveyor Motor 0.09 kW - 1500 d/dk 0.12 hp - 1500 rpm
	Hidrolik Motor Hydraulic Pump Motor 3 kW - 1500 d/dk 4 hp - 1500 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 10.71 kW 14.36 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 m/dk 100 m/dk - 328 ft/min		Ağırlık Weight 7000 kg 15432 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Serit Germe Sistemi Blade Tensioning System Hidrolik Hydraulic

	Kesim Kapasitesi Cutting Capacity 1200 mm 47.24 inch		Kesim Kapasitesi Cutting Capacity 1300 mm 51.18 inch		90°		60°		45°		30°		0°		90°		45°		60°